

Brass and Stainless Steel Fittings

Golan's Brass and Stainless Steel fittings can be used for the full temperature and pressure ranges of Pexgol pipes. Brass saddles with threaded outlets are used for pipes with diameters from 4" to 8".

GP bolt connectors brass female NPT thread range 3" to 8".
GP bolt connectors Stainless Steel male & female NPT

thread range 3" – 8".

Pex double bolt connectors brass range 3" to 6".

Branch-Off Saddles – Female Thread

Brass	Thread
44203205	3" x 2" F
44403207	4" x 2" F
44204005	6" x 2" F
44404007	8" x 2" F




GP Bolt Connectors - Brass Male/Female NPT Thread

Catalog Number	Pipe	SDR	Male Thread
IPS294203	3"	SDR 11	3"
IPS304703	3"	SDR 7.3	3"
IPS294204	4"	SDR 11	4"
IPS304704	4"	SDR 7.3	4"
IPS294206	6"	SDR 11	6"
IPS304706	6"	SDR 7.3	6"
IPS294208	8"	SDR 11	8"
IPS304708	8"	SDR 7.3	8"



GP Bolt Connectors - Stainless Steel Male/Female NPT Thread

Catalog Number	Pipe	SDR	Male Thread
IPS294203-SS	3"	SDR 11	3"
IPS304703-SS	3"	SDR 7.3	3"
IPS294204-SS	4"	SDR 11	4"
IPS304704-SS	4"	SDR 7.3	4"
IPS294206-SS	6"	SDR 11	6"
IPS304706-SS	6"	SDR 7.3	6"
IPS294208-SS	8"	SDR 11	8"
IPS304708-SS	8"	SDR 7.3	8"

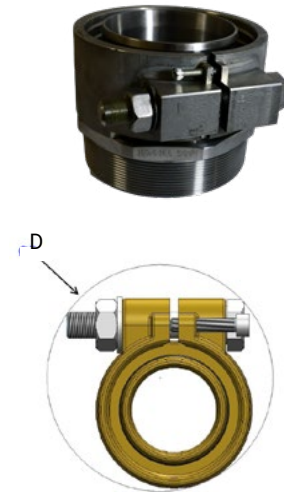

PE-X Double Bolt Connector

Catalog Number	Pipe	Class
IPS91003	3"	SDR 11
IPS92003	3"	SDR 7.3
IPS91004	4"	SDR 11
IPS92004	4"	SDR 7.3
IPS91006	6"	SDR 11
IPS92006	6"	SDR 7.3

